



## Remote Wireless Monitoring

### Halo Wireless Air Velocity Sensor

#### General Description

The Halo Wireless Air Velocity Sensor measures the difference in pressure between two ports to calculate the air speed flowing in a system and temperature.

#### Key Features

- Measurement Range: -50m/s to 50m/s
- Accuracy: +/- 0.5m/s
- Resolution: 0.1m/s
- Automatic temperature compensation
- Altitude compensated available (manually set)
- Configurable thresholds for critical condition monitoring

#### Principles of Operation

The Halo Wireless Air Velocity Sensor measures the rate at which air flows through a system based on a user-configurable time interval or Heartbeat. The sensor measures the air pressure difference between two ports and temperature. Combining this data with an altitude setting, the sensor determines at what rate air is flowing through the system. This measurement is then sent to the gateway, making the data available in Halo, or another approved data service.

#### Example Applications

- Building/Room Pressure
- Air flow
- Variable Air Volume Filter Status
- Duct Pressure
- Clean Rooms
- Hospitals
- Fume Hoods
- Computer Rooms
- Additional applications

#### Features of Halo Sensors

- Wireless range of 2,000+ feet through 18+ walls\*
- Frequency-Hopping Spread Spectrum (FHSS)
- Best-in-class interference immunity
- Best-in-class power management for longer battery life\*\*
- Encrypt-RF® Security (Diffie-Hellman Key Exchange + Advanced Encryption Standard (AES)-128 Cipher Block Chaining (CBC) for sensor data messages)
- Sensor logs 2000 to 4000 readings if the gateway connection is lost (non-volatile flash, persists through power cycling):
  - 10-minute Heartbeats = ~ 22 days
  - 2-hour Heartbeats = ~ 266 days
- Automatic over-the-air updates to sensor firmware (future-proof)
- Free Basic Online Wireless Sensor Monitoring and Notification System to configure sensors, view data, and send alerts via SMS text, email, and voice call

*\*Actual range may vary depending on the environment and gateway.*


*\*\*Battery life is determined by the sensor reporting frequency and other variables. Other power options are also available.*

## Technical Specification – Halo Wireless Air Velocity Sensor

Air Velocity	Tubing Length	4 feet
	Pressure range	-500 Pa to 500 Pa
	Accuracy	+/- 0.5 m/s
	Resolution	0.1 m/s
	Allowable overpressure	100 kPa
	Rated burst pressure	500 kPa
	Max humidity for long-term exposure	40°C (104°F) dew point
	Range at 0m altitude	0-30m/s
	Range at 5000m altitude	0-40m/s
	Range at 8000m altitude	0-50m/s
	Span repeatability	0.5% of reading
	Span shift due to temperature variation	< 0.5% of reading per 10°C (18°F)
	Offset stability	< 0.05 Pa/year
	Calibrated for	Air, N2
	Media compatibility	Air, N2, O2, non-condensing
	Calibrated temperature measurement range	-20°C to 85°C (-4°F to 185°F)
	Temperature resolution	0.1°C (0.18°F)
Temperature accuracy	+/- 2°C (-10°C to 60°C) (+/- 3.6°F (14°F to 140°F) +/- 3°C (-40°C to 85°C) (+/- 5.4°F (-40°F to 185°F)	
Temperature repeatability	+/- 0.1°C (0.18°F)	
Wireless	Data Logging	Sensor logs 2000 to 4000 readings if gateway connection is lost (non-volatile flash, persists through power cycling): 10-minute Heartbeats = ~22 days- 2-hour Heartbeats = ~266 days
	Wireless Protocol	Proprietary Frequency-Hopping Spread Spectrum (FHSS)
	Wireless transmission power (EIRP)	50 mW (900MHz), 25 mW (868 MHz), 10 mW (433 MHz)
	Wireless range	2,000+ ft. through 18+ walls with the Halo Gateway
	Security	Encrypt-RF® (256-bit key exchange and AES-128 CTR)
General	Battery Voltage Range	2.0 to 3.8 VDC
	Operating Altitude	-15.2 to 1,982 m (-50 to 6,500 ft) *
	Storage Altitude	-15.2 to 3,048 m (-50 to 10,000 ft) *
	Operating humidity	5 to 85% RH (non-condensing)
	Certifications	900 MHz sensors: FCC ID: ZTL-G2SC1 and IC: 9794A-G2SC1. 868 and 433 MHz sensors tested and comply with: EN 55032: 2015/A11:2020; EN 55035:2017/A11:2020; ETSI EN 300 220 V3.2.1 (2018-06); ETSI EN 301 489-3 V2.2.0. (2021-11); and ETSI EN 303 645. All sensors tested and comply with: EN 61010-1 and EN 60950 and meet RoHS 2015/863 and REACH 224 (June 2022), according to IEC 63000:2016/AMD1:2022.

\*Operating and storage altitude without DC power supply is -30.48 to 9144 m (-100 to 30000 ft)

This sensor reports air velocity.

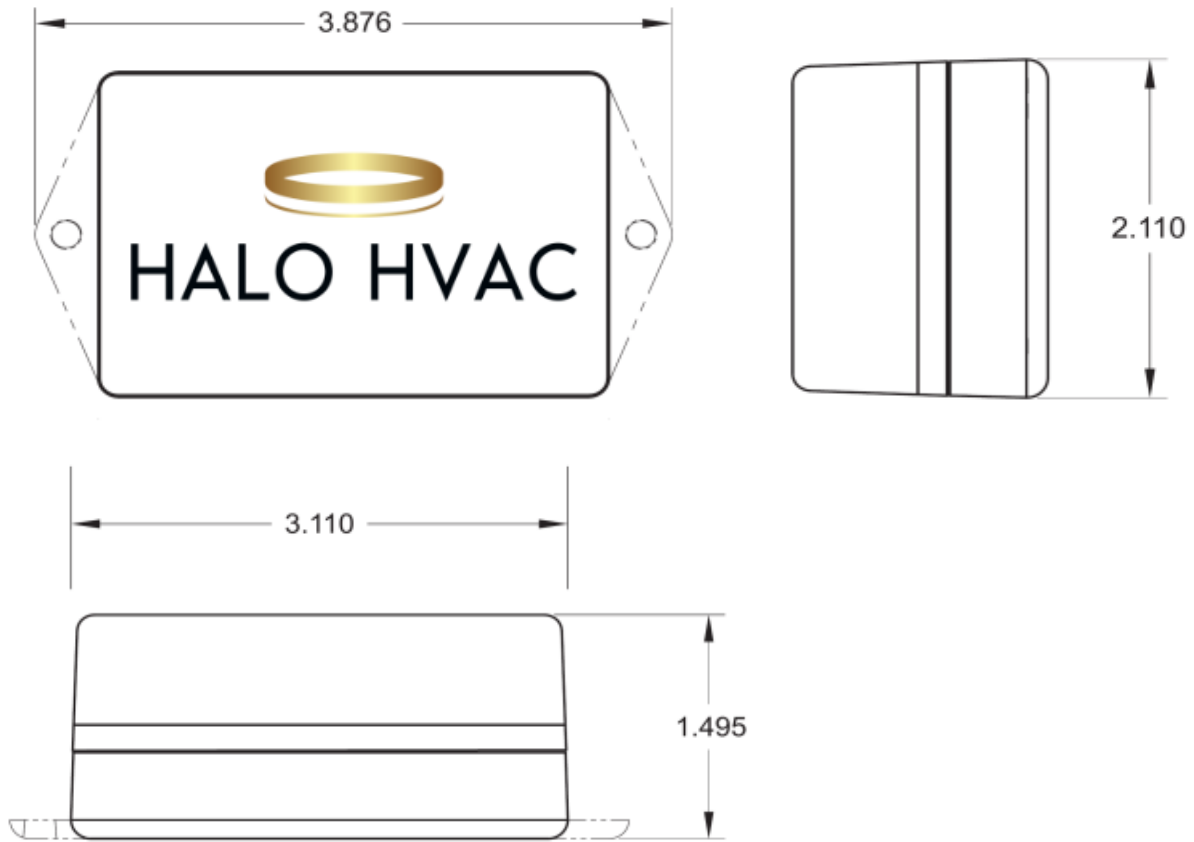


Technical Specification – Halo Wireless Air Velocity Sensor	
Battery*	2x 1.5V AA Alkaline, 1500 mAh, (standard) 2x 1.5V AA Lithium, 3000 mAh, (optional)
Battery Life	8+ years expected
External line-power option**	Input voltage: 5.0-12.0 V Power jack: 2.1 x 5.5 mm barrel, center positive
Operating temperature range (non-leaded measurement range)***	-18°C to 55°C (0°F to 130°F)- AA Alkaline Batteries -25°C to 60°C (-13°F to 140°F)- AA Lithium L91 Batteries 0°C to 40°C (32°F to 104°F)- US 5V Power Supply 10°C to 40°C (50°F to 104°F)- International 5V Power Supply
Wireless antenna type	1/4-wave, 20-gauge wire whip, 3.5" (900/868MHz), 7" (433MHz)
Weight	3.7 oz. (105 g)

\*Hardware cannot withstand negative voltage. Please take care when inserting and removing batteries.

\*\*Batteries will provide backup power in the case the external power is removed.

\*\*\*Operating below 0°C (-32°F) degrees will reduce battery life.

This sensor reports air velocity.

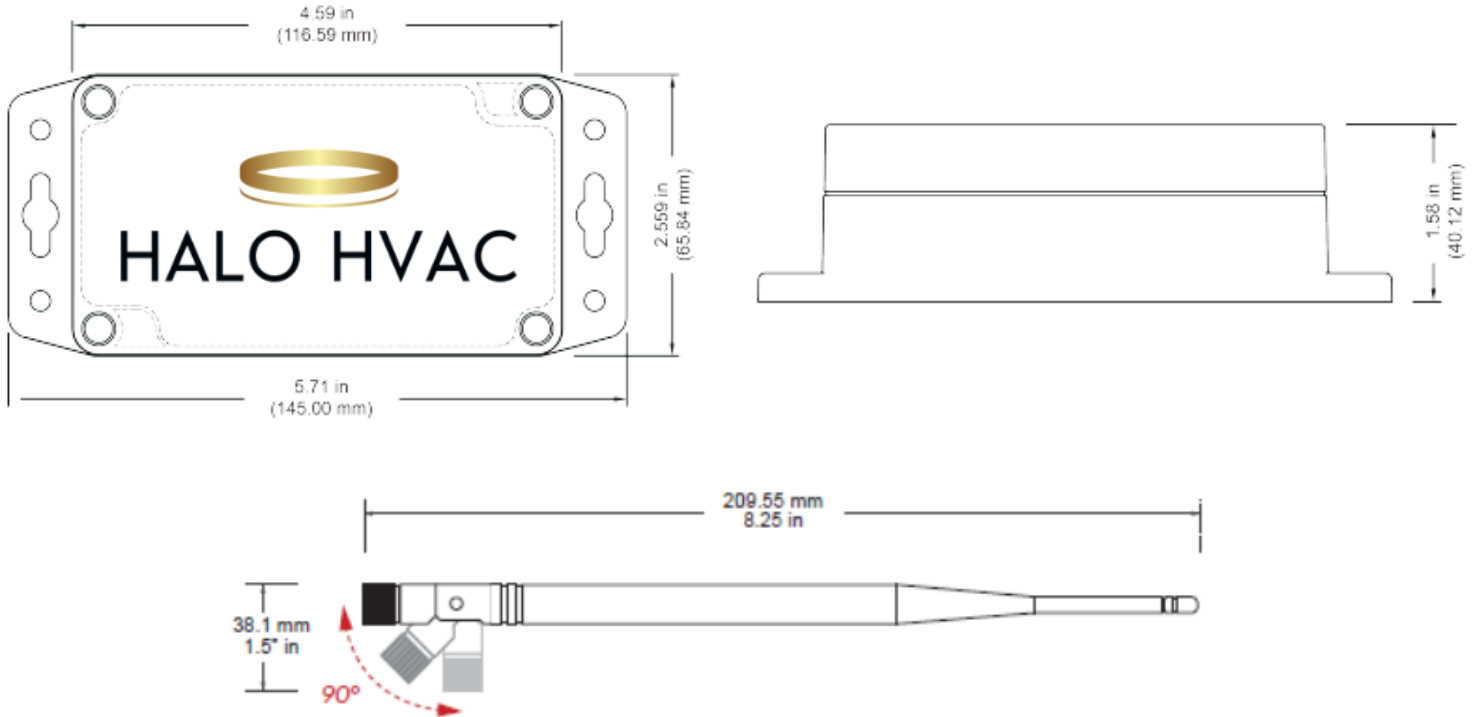

### Technical Specification – Halo Industrial Wireless Air Velocity Sensor

Battery	1x 3.6V AA Lithium Thionyl Chloride, 1500mAh, pre-installed
Battery Life	8+ years expected
Operating temperature range (non-leaded measurement range)*	-40°C to 85°C (-40°F to 185°F)
Wireless antenna type	1/2-wave waterproof dipole with RP-SMA connector and swivel neck; dBi of 3.0 (900/868MHz) or 2.5 (433 MHz); length of 8.27" (210mm) (900/868MHz) or 7.68" (195mm) (433 MHz); diameter at thickest point of 0.55" (14mm)
Weight	4.7 oz. (133 g)
Enclosure rating	IP-65 (dust-proof and waterproof but not submersible) NEMA 1, 2, 4, 4x, 12, and 13 rated, sealed, and weatherproof UL Listed to UL508-4x specifications (File E194432)

\*Operating below 0°C (-32°F) degrees will reduce battery life.

## Commercial-Grade Sensors

Halo commercial-grade sensors are designed for applications in ordinary environments (normal room temperature, humidity, and atmospheric pressure). Do not use these sensors under the following conditions as these factors can deteriorate the product characteristics and cause failures and burnout.

- Corrosive gas or deoxidizing gas: chlorine gas, hydrogen sulfide gas, ammonia gas, sulfuric acid gas, nitric oxide gas, etc.
- Volatile or flammable gas
- Dusty conditions
- Low-pressure or high-pressure environments
- Wet or excessively humid locations
- Places with salt water, oils, chemical liquids, or organic solvents
- Where there are excessively strong vibrations
- Other places where similar hazardous conditions exist

Use these products within the specified temperature range. Higher temperatures may cause deterioration of the characteristics or the material quality.

## Industrial-Grade Sensors

Halo industrial sensors are enclosed in reliable, weatherproof NEMA-rated enclosures. Our NEMA-rated enclosures are constructed for both indoor or outdoor use and protect the sensor circuitry against the ingress of solid foreign objects like dust and the damaging effects of water.

- Safe from falling dirt
- Protects against wind-blown dust
- Protects against rain, sleet, snow, splashing water, and hose-directed water
- Increased level of corrosion resistance
- Will remain undamaged by ice formation on the enclosure



# HALO HVAC

